



SYNTHESIS®

Phone 888.691.4171
 FAX 516.682.3510
 E-Mail Websupport5@harman.com
 Web www.jbl.com

S4VC

250 Crossways Park Drive, Woodbury, NY 11797
 516.496.3400

H A Harman International® Company

QUICK SPECS


Features


- ◆ THX Ultra2™-Certified Loudspeaker
- ◆ Fits Completely Flush in a 6" Depth Wall
- ◆ Integrated One-Piece Back Box
- ◆ Retrofit (S4RFB) and New Construction (S4PCB) Bracket Available
- ◆ Elliptical Oblate Spheroidal™ (EOS) Waveguide
- ◆ Magnetic Shielded
- ◆ Pure Titanium High Frequency Domes with Neodymium Magnet Structure



Specifications

Maximum Recommended Amplifier Power	250 Watts
Nominal Impedance	6 Ohms
Sensitivity (2.83V @ 1m)	91dB
Frequency Response (-3dB)	65Hz – 20kHz
Crossover Frequencies	600Hz, 3.5kHz
High-Frequency Transducers	1" pure-titanium dome with rubber surround, shielded, with EOS waveguide
Midrange Transducers	4" Titanium inverted dome with rubber surround, neodymium magnet and cast-aluminum basket
Low-Frequency Transducer	8" Titanium-allow inverted dome with rubber surround and cast-aluminum basket
Connections	2-conductor push-type, 10 to 16 gauge;
Dimensions (H x W x D)	23-7/8" x 14" x 5-1/2" (606mm x 356mm x 140mm)
Weight	26 lb (11.8kg)

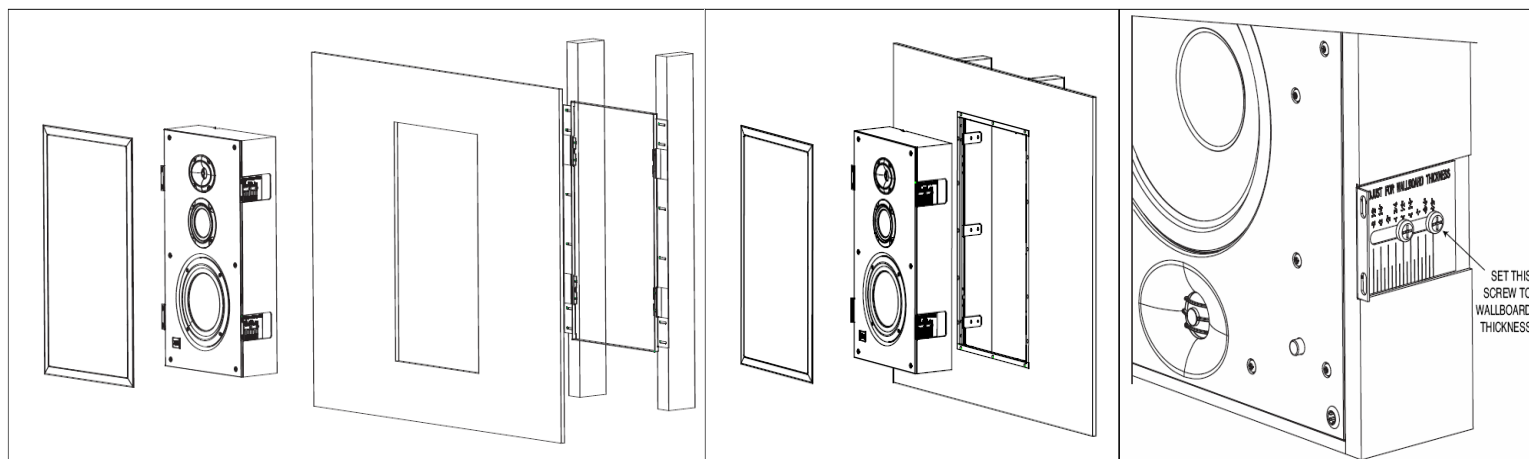


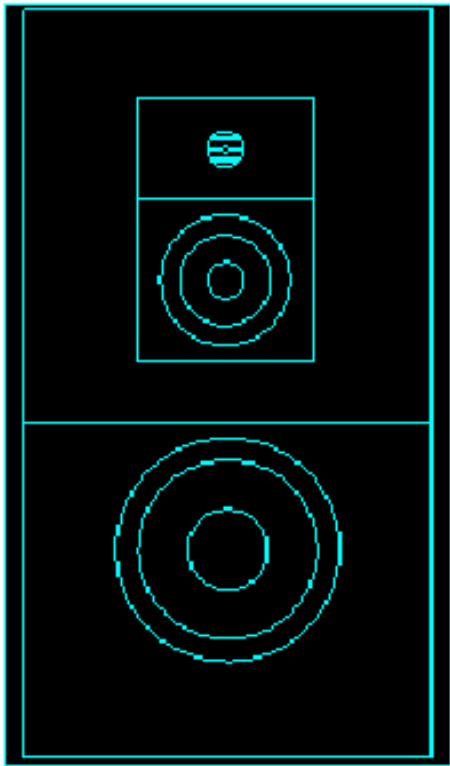

23-7/8"
606mm



14"
356mm

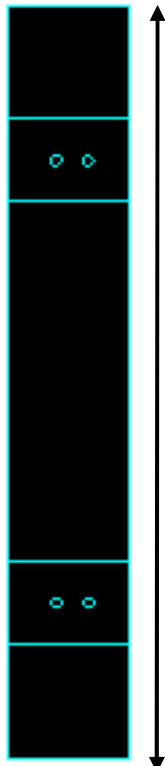

23-7/8"
606mm




5-1/2"
140mm




5-1/2"
140mm



14"
356mm

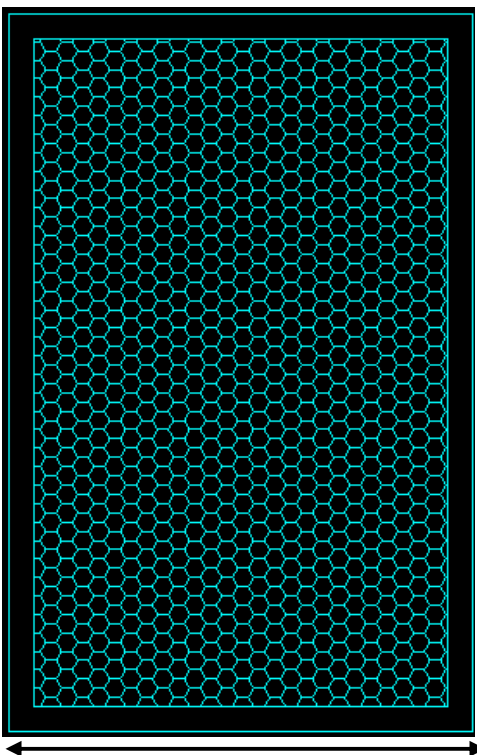

25-1/8"
639mm



16-1/4"
412mm